


PCE-7131

LGA1151 8th and 9th Generation Intel® Xeon® E/Core™ i7/i5/i3/Pentium® LGA1151 System Host Board with DDR4, SATA 3.0, USB 3.1, M.2, Dual GbE, and Triple Displays

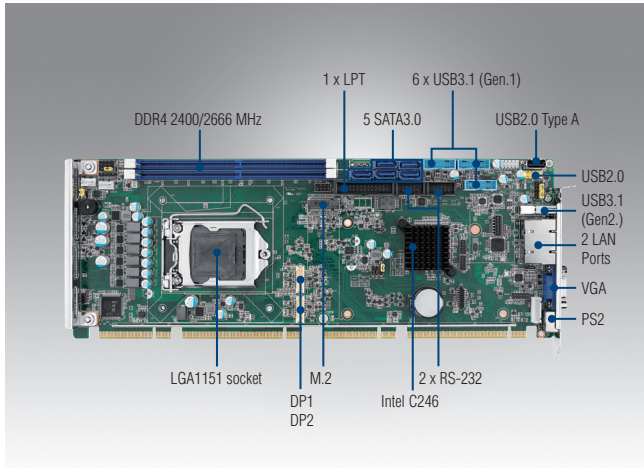

Features

- Intel® Xeon® E Family/Core™ i7/i5/i3 LGA1151 processor with C246 chipset
- Up to 64 GB of dual-channel (non-ECC) DDR4 2400/2666 MHz
- PCIe 3.0, M.2, USB 3.1, SATA 3.0, and SW Raid 0, 1, 5, 10
- Supports VGA and 2 x DVI-D/DP display (with optional cable)
- Supports out-of-band remote management with AMT
- Supports Advantech's LPC modules, SUSIAccess, and embedded software APIs

Note: Intel 8th and 9th generation processors only support Windows 10 (64-bit) (RS5 version)


Quiet

CE FCC

Specifications

	CPU	i7-	i7-	i7-	i7-	i5-	i5-	i5-	i5-	i3-	i3-	i3-	i3-	G5400	G5400T	G4900	G4900T	Xeon	Xeon	Xeon	Xeon	Xeon	
		9700E	9700TE	8700	8700T	9500E	9500TE	i5-8500	i5-8500T	i3-9100E	i3-9100TE	i3-8100	i3-8100T	G5400	G5400T	G4900	G4900T	E-2278GE	E-2278GEL	E-2226GE	E-2176G	E-2124G	
Processor System	Speed	2.6GHz	1.8 GHz	3.2 GHz	2.4 GHz	3.0 GHz	2.2 GHz	3.0 GHz	2.1 GHz	3.1 GHz	2.2 GHz	3.6 GHz	3.1 GHz	3.7 GHz	3.1 GHz	3.1 GHz	2.9 GHz	3.3 GHz	2.0 GHz	3.4 GHz	3.7 GHz	3.4 GHz	
	L3 Cache	12 MB	12 MB	12 MB	12 MB	9 MB	9 MB	9 MB	9 MB	6 MB	6 MB	6 MB	6 MB	4 MB	4 MB	2 MB	2 MB	16M	16M	12M	12M	8M	
	Cores	8	8	6	6	6	6	6	6	4	4	4	4	2	2	2	2	8	8	6	6	4	
	TDP	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	58 W	35 W	54 W	35 W	80W	35W	80W	80W	71W	
	SKU/Chipset	Intel® C246																					
BIOS	AMI® SPI Flash 256 Mbit																						
Bus	PCI-Express	1 x PCIe x16/2 x PCIe x8 and 1 x PCIe x4 to backplane																					
	PCI	4 x PCI master to backplane, 32-bit, 33 MHz																					
Memory	Technology	Dual-channel (non-ECC) U-DIMM DDR4 2400/2666 MHz (supports x8 DDR4 1024 M) (Note: Intel ECC-supported processor must be selected to enable ECC function)																					
	Max. Capacity	up to 64GB (based on CPU)																					
	Socket	2 x DDR4 288-pin DIMM																					
Graphics	Controller	Chipset integrated with Intel® HD Graphics																					
	VRAM	Shared system memory is subject to OS																					
	VGA	Supports resolutions of up to 1920 x 1200 pixel @ 60 MHz																					
	DVI-D	Supports resolutions of up to 1920 x 1200 pixel @ 60 MHz																					
	Display Port	Supports resolutions of up to 1920 x 1080 pixel @ 60 Hz																					
Ethernet	Triple Display	VGA+DP/DVI-D+DP/DVI-D																					
	Interface	10/100/1000 Mbps																					
Rear I/O	Controller	LAN 1: Intel® I219-LM LAN 2: Intel® I210-AT																					
	Connector with LED	2 x RJ45																					
	USB 3.1 Gen2	1																					
Internal Connector	Ethernet	2																					
	VGA	1																					
	PS/2	1 (PS/2 Y cable supports 1 x keyboard and 1 x mouse)																					
	USB	7 x USB 2.0 (pin header*2 + USB Type A*1 + 4 on backplane) 4 x USB 3.0 (pin header)																					
	SATA (SW Raid 0,1,5,10)	5																					
	M.2 (2280 Type M)	1 (support SATA3.0 and PCIe interface)																					
	DP/DVI-D	2 (Pin header)																					
	COM	2																					
	Parallel	1																					
	IrDA	1																					
GPIO	8bit																						
Watchdog Timer	Output	System reset																					
	Interval	Programmable 1-255 sec																					
Miscellaneous	Audio	Intel® High Definition audio interface (requires audio extension module PCA-AUDIO-HDB1E)																					
Power Requirement	Test Environment	i7-8700, 3.2 GHz, with 2 x 8-GB DDR4 2400																					
	Voltage	+12V										+5V					+3.3V						
	Current	4.30A					2.15A					0.69A											
Environment	Operating																		Non-Operating				
	Temperature	0 ~ 60 °C (dependent on CPU and cooler solution)																	-40 ~ 85 °C				
Physical	Humidity	40 °C @ 85% relative humidity (non-condensing)																	60 °C @ 95% relative humidity (non-condensing)				
	Dimensions (L x H)	338 x 122 mm (13.3" x 4.8")																					

Block Diagram

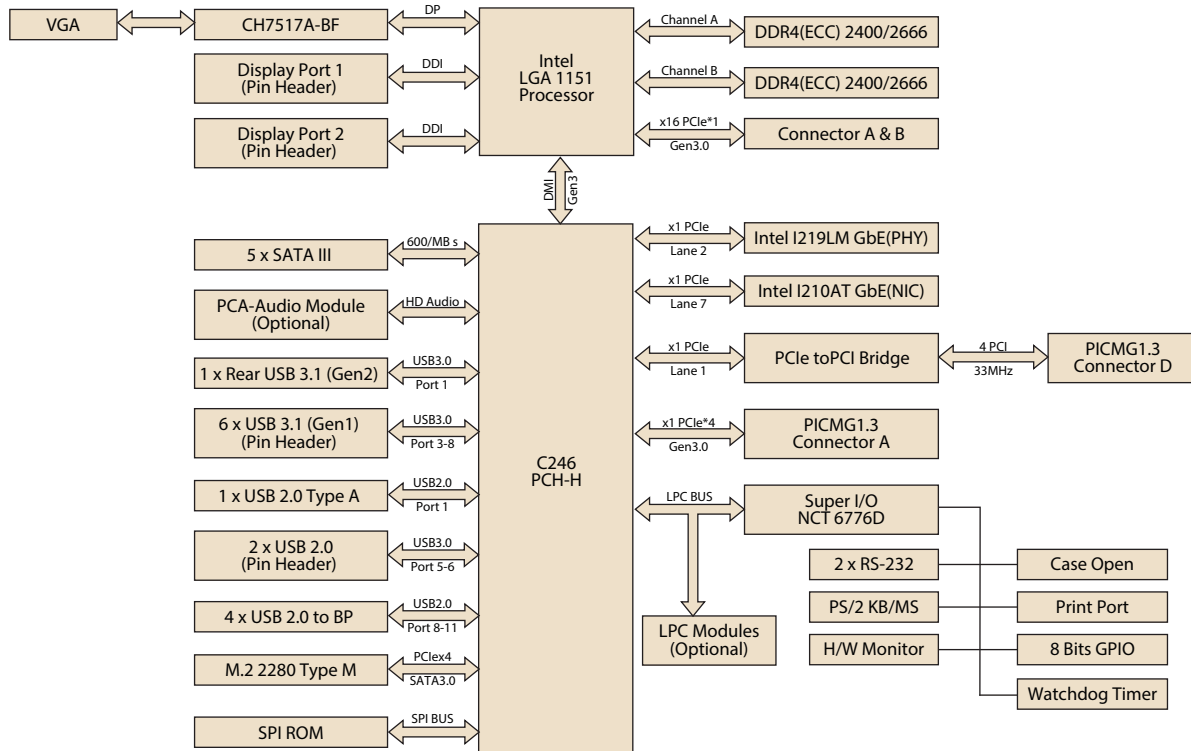

Ordering Information

Part Number	PCH	Memory	Backplane	LAN	VGA	DP/DVI-D	COM	SATA III	M.2	USB 2.0	USB 3.1 (Gen1)	USB3.1 (Gen2)	S/W Raid	AMT
PCE-7131G2-00A1	C246	ECC/Non-ECC	PCE-5BXX PCE-7BXX	2	Yes	2*	2	5	1	7	6	1	Yes	Yes

Note: DP/DVI-D cable is optional

Packing List

Part Number	Description	Quantity
1700003194	Serial ATA HDD data cable	x2
1700022749-11	Serial ATA HDD power cable	x1
1701260305	COM + printer ports cable kit	x1
1700060202	Keyboard and mouse Y-cable	x1
1700022204	2-port USB cable kit	x1
2190000902	Warranty card	x1
2001512910	Startup manual	x1
2061512900	Utility CD	x1

Optional Accessories

Part Number	Description
1960049408N001	CPU cooler for 1U Chassis and 84W TDP
1960050255N001/ 1960077101N001	CPU cooler for 2U Chassis and 95W TDP
1960052651N021	CPU cooler for 2U/4U Chassis and 80W TDP
PCA-AUDIO-HDB1E	Audio module
PCA-COM232-00A1E	4-port RS-232 LPC module
PCA-COM485-00A1E	4-port RS-422/485 LPC module
1700031719-01	4-port USB 3.0 cable w/ BKT (30cm)
1700020277-01	2-port USB 3.0 cable w/ BKT (30 cm)
1700021831-01	DP to DVI-D cable w/ BKT
PCE-DP10-00A1E	DP to DP cable w/ BKT
PCA-TPM-00B1E	TPM 2.0 module

I/O View



PCE-7131G2-00A1E